

The ECR™ 97gb



97% Efficient, 100% Easy to Install

The ECR™ 97gb Condensing Hot Water Boiler

We've combined the flexibility a professional needs for installation with the affordable energy solutions and efficiency homeowners want.

- Top and bottom connections for easy match up to existing piping
- Optional space-saving wall or conventional floor-mount installation
- The ease of a built-in pump – eliminating the time and expense of adding one for most applications

But don't be fooled by its compact, lightweight design. The ECR 97gb delivers one of the industry's highest efficiencies, with 97% AFUE for long-term energy savings and comfort.

Another way we're bringing Innovative Living to our customers.










kiwa
Certified

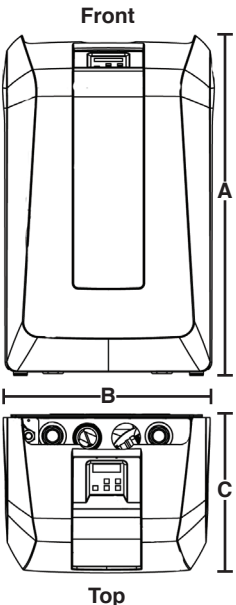

www.ecrinternational.com | 800.325.5479

 **ecr**
innovative living™

ECR™ 97gb Natural or Propane Gas-Fired Condensing Hot Water Boiler

Dimensions/Weights	Model	Boiler Input Rate (MBH) ⁽¹⁾		Heating Capacity (MBH) ⁽¹⁾⁽²⁾	Net I=B=R Rating, Water (MBH) ⁽¹⁾⁽³⁾	AFUE % ⁽²⁾																																			
		Max.	Min.																																						
 <p>Front</p> <p>Top</p> <p>Dimensions Height (A): 35 5/8" (905 mm) Width (B): 22 1/16" (560 mm) Depth (C): 16 3/16" (411 mm)</p> <p>Weights Ship Wgt.:140 lbs. (63.5 kg) Boiler Wgt.:115 lbs. (51.2 kg)</p>	ECR075	75	15	69	60	97.0																																			
	ECR100	100	20	91	79	97.0																																			
(1) 1000 Btu/hr (British Thermal Units Per Hour) (2) Heating Capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedures. (3) Net I=B=R Ratings based on piping and pickup allowance of 1.15. Contact ECR Technical Support before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.																																									
General Information (See Installation, Operation and Maintenance Manual for complete instructions)																																									
Flooring May be installed on Combustible flooring (No Carpets)																																									
<table border="1"> <thead> <tr> <th rowspan="2">Clearances</th> <th rowspan="2"></th> <th>Combustible Materials (Required)</th> <th>Service*</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>0" (0 cm)</td> <td>14" (36 cm)</td> </tr> <tr> <td>Left Side</td> <td></td> <td>6" (15 cm)</td> <td>6" (16 cm)</td> </tr> <tr> <td>Right Side</td> <td></td> <td>0" (0 cm)</td> <td>1 1/2" (4 cm)</td> </tr> <tr> <td>Front</td> <td></td> <td>0" (0 cm)</td> <td>6" (16 cm)</td> </tr> <tr> <td>Back</td> <td></td> <td>0" (0 cm)</td> <td>0" (0 cm)</td> </tr> <tr> <td>Bottom</td> <td></td> <td>0" (0 cm)</td> <td>0" (0 cm) Floor Mount 12" (32 cm) Bottom Piped</td> </tr> <tr> <td>Combustion Air/Vent Piping</td> <td></td> <td>0" (0 cm)</td> <td>6" (16 cm)</td> </tr> <tr> <td>Hot Water Piping</td> <td></td> <td>1/2" (1.3 cm)</td> <td>6" (16 cm)</td> </tr> </tbody> </table> <p>All distances measured from the boiler. *Service clearance recommended only - not required).</p>							Clearances		Combustible Materials (Required)	Service*	Top	0" (0 cm)	14" (36 cm)	Left Side		6" (15 cm)	6" (16 cm)	Right Side		0" (0 cm)	1 1/2" (4 cm)	Front		0" (0 cm)	6" (16 cm)	Back		0" (0 cm)	0" (0 cm)	Bottom		0" (0 cm)	0" (0 cm) Floor Mount 12" (32 cm) Bottom Piped	Combustion Air/Vent Piping		0" (0 cm)	6" (16 cm)	Hot Water Piping		1/2" (1.3 cm)	6" (16 cm)
Clearances		Combustible Materials (Required)	Service*																																						
		Top	0" (0 cm)	14" (36 cm)																																					
Left Side		6" (15 cm)	6" (16 cm)																																						
Right Side		0" (0 cm)	1 1/2" (4 cm)																																						
Front		0" (0 cm)	6" (16 cm)																																						
Back		0" (0 cm)	0" (0 cm)																																						
Bottom		0" (0 cm)	0" (0 cm) Floor Mount 12" (32 cm) Bottom Piped																																						
Combustion Air/Vent Piping		0" (0 cm)	6" (16 cm)																																						
Hot Water Piping		1/2" (1.3 cm)	6" (16 cm)																																						
<table border="1"> <thead> <tr> <th rowspan="2">Combustion Air & Vent Length Piping (Schedule 40 PVC)</th> <th rowspan="2"></th> <th>2" Pipe Equivalent Ft. (m)</th> <th>3" Pipe Equivalent Ft. (m)</th> </tr> </thead> <tbody> <tr> <td>Min. Length</td> <td>6 Ft. (1.8 m)</td> <td>6 Ft. (1.8 m)</td> </tr> <tr> <td>Max. Length</td> <td></td> <td>60 Ft. (18.3 m)</td> <td>100 Ft. (30.4 m)</td> </tr> </tbody> </table> <p>Notes: 1 - 90° Elbow = 5 Ft. (1.6 m), 1 - 45° Elbow = 3.5 Ft. (1.1 m), 1 - 2" x 3" Adapter = 0 Ft. (0 m) Concentric Vent Kit = 5 Ft. (1.6 m) equivalent length.</p>							Combustion Air & Vent Length Piping (Schedule 40 PVC)		2" Pipe Equivalent Ft. (m)	3" Pipe Equivalent Ft. (m)	Min. Length	6 Ft. (1.8 m)	6 Ft. (1.8 m)	Max. Length		60 Ft. (18.3 m)	100 Ft. (30.4 m)																								
Combustion Air & Vent Length Piping (Schedule 40 PVC)		2" Pipe Equivalent Ft. (m)	3" Pipe Equivalent Ft. (m)																																						
		Min. Length	6 Ft. (1.8 m)	6 Ft. (1.8 m)																																					
Max. Length		60 Ft. (18.3 m)	100 Ft. (30.4 m)																																						
Connections Return/Supply Water: 1-1/4 NPT Gas In: 1/2 NPT Condensate Drain: 1/2" PVC																																									
Electrical 120 Volts AC, 60 hertz, 1 phase, Less than 12 amps (15 amp circuit recommended) (om)																																									
Water Content 1.1 Gallons																																									
Standard Equipment Mounting Floor/Wall: Leveling Legs and Wall Bracket both included. Boiler Control Module: Automatic Low Voltage/Intermittent Power Reset. Controls up to 16 boilers for multiple boiler applications. User Display Interface: Easy programming with text display. Remote mount option utilizes standard thermostat conductor wiring. Heat Exchanger: High grade 316L/444 Stainless Steel Fin Coil with Flame Sight Glass. Built-in Primary/Secondary Manifold Piping and Pump. Combustion: Gas Valve with Premix Venturi and Blower, Durable Stainless Steel Mesh Burner, Direct Spark Igniter, Flame Sensor and LP Conversion Kit included. Electrical: Detachable Low Voltage Terminal Strip, High Voltage Junction Box, Transformer, Lighted Power Switch and Auxiliary Service Power Outlet. Other: Low Water Cutoff with test feature, 30 PSI Safety Relief Valve, Boiler Drain Valve and Condensate Drain with built in trap.																																									
Options Central Heating Pump (Taco 007 or Grundfos UP15-42F)																																									
Accessories Concentric Vent Kit (2" and 3"), System Sensor (For Multiple Boiler Applications), Computer Interface																																									
Certifications      																																									

Due to ongoing product development, specifications are subject to change without notice.